

Easyflex

TM

SS Braided Connector with Copper Ends




Suitable for use with Refrigerants

R12	R401A	R407A	R410A
R22	R401B	R407B	R410B
R23	R402A	R407C	R502
R125	R402B	R408A	R507
R134A	R404A	R408A	R508, R509



Stainless Steel Vibration Eliminators With Copper Ends

Part No.	Actual OD of Copper Tubing (in)	Dimension in mm				Max. Working Pressure (psi.)	Burst Pressure (psi.)
		A	B (±3)	C	D (±5)		
SLBZ10	3/8	9.6	20	1.2	300	580	3770
SLBZ12	1/2	12.8	22	1.2	300	580	3770
SLBZ15	5/8	16.0	24	1.2	300	580	3770
SLBZ20	3/4	19.2	32	1.2	300	580	3770
SLBZ22	7/8	22.2	37	1.2	300	507	2900
SLBZ25	1-1/8	28.6	46	1.5	300	507	2465
SLBZ32	1-3/8	34.9	51	1.5	300	507	2320
SLBZ40	1-5/8	41.3	57	1.5	300	493	1740
SLBZ50	2-1/8	54.0	70	2.0	300	493	1740

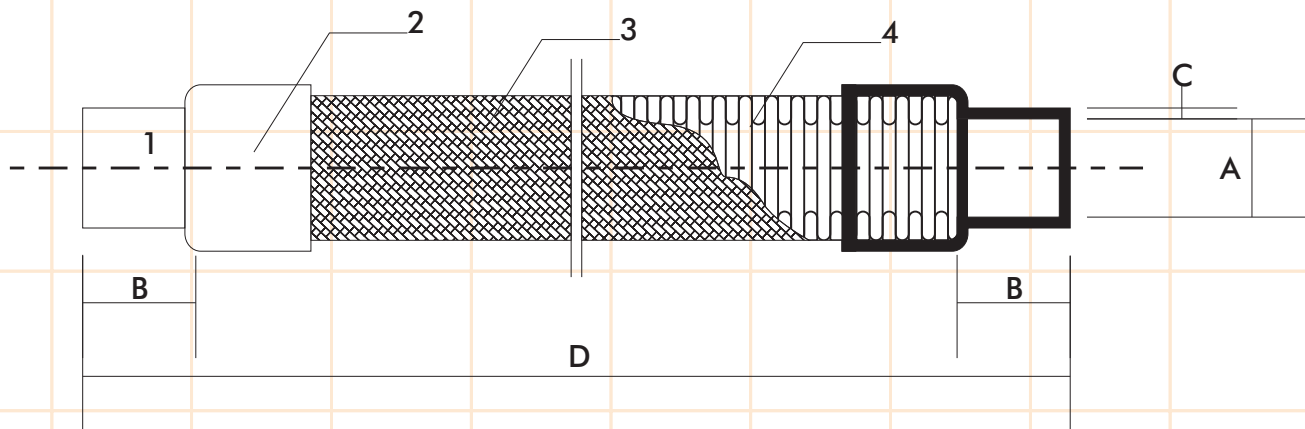

1 = Copper End 2 = Neck Ring 3 = SS Braid 4 = SS Corrugated Hose