


# Easyflex<sup>TM</sup>

## Wrap-on Flexible Duct Connector Style : EFWODC




FLEXIBILITY :  $\pm 10$  MM OR MORE  
TEMPERATURE : UPTO  $100^{\circ}$  C  
PRESSURE RANGE : -3000mm WC. TO +3000mm WC.  
STANDARD WIDTH : 150 MM / 200 MM  
STANDARD LENGTH : UPTO 5 Meter Rolls

### Available in 3 basic types :


- Full Width Fabric.
- With GI / Aluminum Metal edges covered with fabric.
- With GI / Aluminum Metal edges partly covered with fabric.

- ⇒ Easyflex WRAP-ON Flexible Duct Connector will met every type of installation requirement in hospitals, offices, large buildings, factories, institutions etc.
- ⇒ Maximum design freedom - does not need to be excessively large than ducting.
- ⇒ Connectors will effectively isolate Vibration, Noise & Rattles resulting from operation of Fans & blowers.
- ⇒ Connectors will protect duct work and ancillary equipment from the effect of Vibration, Movements & Misalignment.
- ⇒ Connectors can be used on both cool and warm side of air conditioning systems - highly suitable for duct carrying heavily moisture laden air.
- ⇒ Durable construction - Neoprene impregnated and leak proofed fabric is fire retardant, resists grease, gasoline vapours, acids, moisture, mildew, etc.


- Tear resistant.
- Excellent flexing properties.
- Low resistance to deflection.
- Combination of metal & fabric give added strength & flexibility.
- Fire Retardent Neoprene Rubber

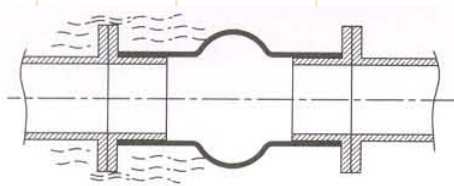


VIBRATION ISOLATION

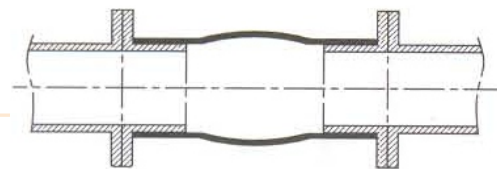

AXIAL EXPANSION

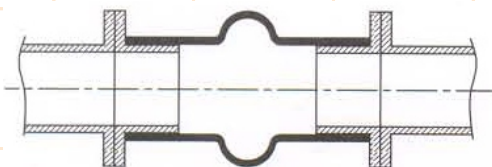

AXIAL CONTRACTION

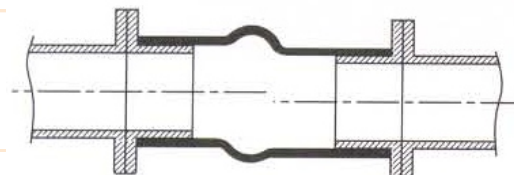

LATERAL DEFLECTION

⇒ Higher Thickness/Length/Polymers available please contact our engineering department.