


# Easyflex<sup>TM</sup>

## Stainless Steel Braided Flexible Pump Connectors

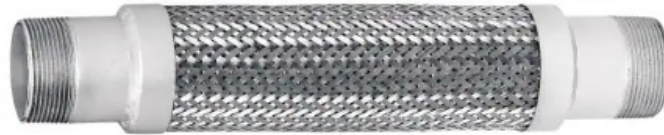


### ASSEMBLY MATERIALS

**Hose:** 304 Stainless Steel Corrugated Hose .008 to .012 Wall

**Braid:** 304 Stainless Steel One Braid (8" (200mm) and Larger IS A Braided-braid)

**Ends:** Carbon Steel Male NPT

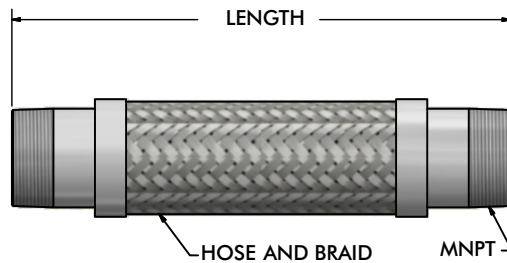

Model No. Nominal Bore x Overall Length	Working Pressure @ 70°F (PSIG)	Working Pressure @ 250°F (PSIG)	Static Bend Radius (mm)	Dynamic Bend Radius (mm)
EFMHPC-TC 0.50" x 6.5"	853	776	40	10
EFMHPC-TC 0.75" x 7"	640	583	50	17
EFMHPC-TC 1" x 8"	497	452	90	32
EFMHPC-TC 1.25" x 8.5"	426	387	90	34
EFMHPC-TC 1.50" x 9"	437	397	110	45
EFMHPC-TC 2" x 10.5"	444	404	170	67
EFMHPC-TC 2.50" x 12"	345	313	80	73
EFMHPC-TC 3" x 14"	289	262	90	123
EFMHPC-TC 4" x 16"	300	273	130	279

Maximum Permanent Offset From Centerline: 3/8" (10mm)

Maximum Intermittent Offset From Centerline: 3/8" (10mm)