


**Suitable for use with Refrigerants**

R12	R401A	R407A	R410A
R22	R401B	R407B	R410B
R23	R402A	R407C	R502
R125	R402B	R408A	R507
R134A	R404A	R408A	R508, R509



**Stainless Steel Vibration Eliminators With Copper Ends**

Part No.	Actual OD of Copper Tubing (in)	Dimension in mm				Max. Working Pressure (psi.)	Burst Pressure (psi.)
		A	B (±3)	C	D (±5)		
SLBZ10	3/8	9.6	20	1.2	300	580	3770
SLBZ12	1/2	12.8	22	1.2	300	580	3770
SLBZ15	5/8	16.0	24	1.2	300	580	3770
SLBZ20	3/4	19.2	32	1.2	300	580	3770
SLBZ22	7/8	22.2	37	1.2	300	507	2900
SLBZ25	1-1/8	28.6	46	1.5	300	507	2465
SLBZ32	1-3/8	34.9	51	1.5	300	507	2320
SLBZ40	1-5/8	41.3	57	1.5	300	493	1740
SLBZ50	2-1/8	54.0	70	2.0	300	493	1740

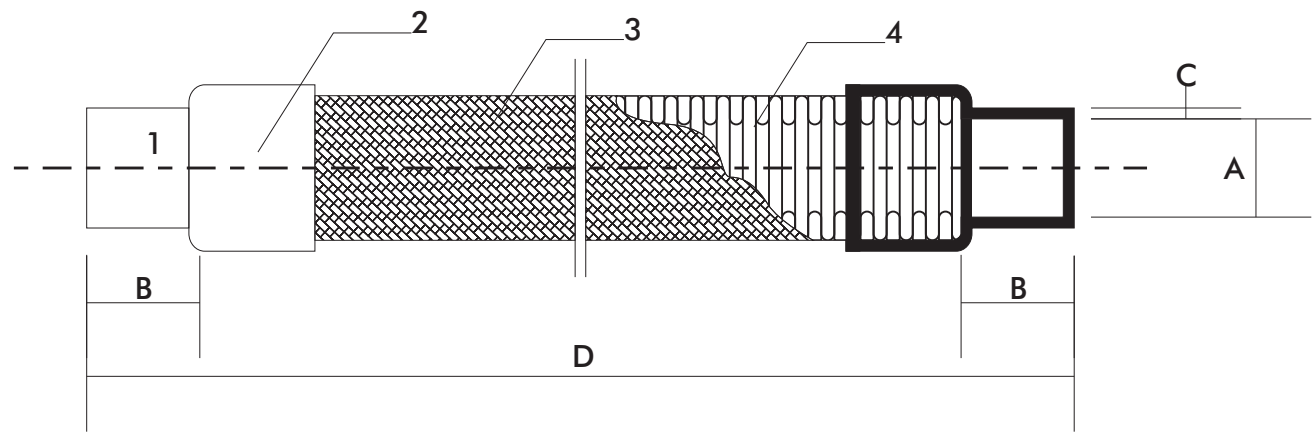

1 = Copper End    2 = Neck Ring    3 = SS Braid    4 = SS Corrugated Hose